


360° SURFACE/FLUSH SENSOR



55-461

Description	Colour	Model
Surface/Flush Mount Sensor	White	55-461

- Multi-function
 - On/Off
 - Time adjustment
 - Light sensing
- Built-in walk test function
- Dual element sensor
- Cutout diameter: 57mm
- ABS construction

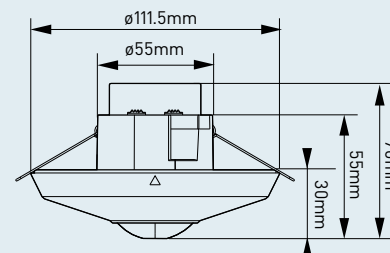

TECHNICAL DATA

Mounting	Surface or Flush
Sensor Adjustment	Adjustable with Lens Shield
Sensor Type	Passive IR
Detection Range	7m Diameter at 2.5m High
Detection Angle	360°
Time on Adjustment	5 sec to 30 mins
Lux Setting (Lux)	0 to 2000
Load	- 2000W max. for Incandescent Light - 1000W max. for Halogen Light - 1000VA max. for Low Voltage Halogen Light - 900VA/100µ F for Fluorescent Light - 600VA (400W) Max. for Energy Saving Lamp (CFL PL Lamps)
Voltage	Indoor: 0°C to 45°C Outdoor: -20°C to 45°C
Operating Temperature	0°C to +45°C
Environment Protection	IP44
Power Consumption	-

